# LG NeON®R

# LG360Q1C-V5



LG Neon R is LG's highest efficiency module in the market and provides world-class performance. The unique, back-contact cell structure eliminates electrodes on the front which maximizes the collection of light and improves overall reliability. LG Neon R features an enhanced warranty, improved aesthetics on residential roof-tops, and the highest performance and durability under real-world conditions.











60

### **Features**



#### Aesthetic Roof

LG NeON® R has been designed with aesthetics in mind: the lack of any electrodes on the front creates an improved, modern aesthetic.



#### **Extended Product Warranty**

LG has extended the product warranty of the NeON® R to 25 years, which is top level in the industry.



# Better Performance on a Sunny Day

LG NeON® R now performs better on sunny days, thanks to its improved temperature coefficient.



## More generation per square meter

The LG NeON® R has been designed to significantly enhance its output, making it efficient even in limited space.

# About LG Electronics

LG Electronics is a global leader in electronic products in the clean energy markets by offering solar PV panels and energy storage systems. The company first embarked on a solar energy source research program in 1985, supported by LG Group's vast experience in the semi-conductor, LCD, chemistry and materials industries. In 2010, LG Solar successfully released its first MonoX® series to the market, which is now available in 32 countries. The NeON® (previous MonoX® NeON), NeON®2, NeON®2 BiFacial won the "Intersolar AWARD" in 2013, 2015 and 2016, which demonstrates LG's leadership and innovation in the solar industry



LG360Q1C-V5.indd 1 3/28/19 6:22 PM

# **LG** NeON®R

# LG360Q1C-V5

#### General Data

Cell Properties (Material/Type)	Monocrystalline / N-type
Cell Maker	LG
Cell Configuration	60 Cells (6 x 10)
Module Dimensions (L x W x H)	1,700mm x 1,016mm x 40mm
Weight	17.5 kg
Glass (Thickness / Material)	2.8mm / Tempered Glass with AR Coating
Backsheet (Color)	White
Frame (Material)	Anodized Aluminium
Junction Box (Protection Degree)	IP68 with 3 Bypass Diodes
Cables (Length)	1,000mm x 2EA
Connector (Type / Maker)	MC 4 / MC

#### Certifications and Warranty

Cer tirications and vvarianty		
IEC 61215-1/-1-1/2:2016, IEC 61730-1/2:2016,		
UL 1703		
ISO 9001, ISO 14001, ISO 50001		
OHSAS 18001		
IEC 61701:2012 Severity 6		
IEC 62716:2013		
Type 1		
Class C (UL 790)		
25 Years		
Linear Warranty*		

<sup>\* 1) 1</sup>st year: 98%, 2) After 1st year: 0.3% annual degradation, 3) 25 years: 90.8%

#### **Temperature Characteristics**


NMOT*	[°C]	44 ± 3
Pmax	[%/°C]	-0.30
Voc	[%/°C]	-0.24
Isc	[%/°C]	0.037

 $<sup>\</sup>star$  NMOT (Nominal Module Operating Temperature): Irradiance 800 W/m2, Ambient temperature 20 °C, Wind speed 1 m/s, Spectrum AM 1.5

# **Electrical Properties (NMOT)**

Licetificat i roperties (runo i)			
Model		LG360Q1C-V5	
Maximum Power (Pmax)	[W]	270	
MPP Voltage (Vmpp)	[V]	36.4	
MPP Current (Impp)	[A]	7.45	
Open Circuit Voltage (Voc)	[V]	40.2	
Short Circuit Current (Isc)	[A]	8.69	

# I-V Curves

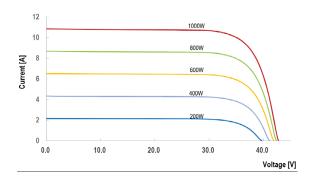

#### Electrical Properties (STC\*)

Model		LG360Q1C-V5
Maximum Power (Pmax)	[W]	360
MPP Voltage (Vmpp)	[V]	36.5
MPP Current (Impp)	[A]	9.87
Open Circuit Voltage (Voc, ± 5%)	[V]	42.7
Short Circuit Current (Isc,±5%)	[A]	10.79
Module Efficiency	[%]	20.8
Power Tolerance	[%]	0~+3

<sup>\*</sup> STC (Standard Test Condition): Irradiance 1000 W/m², Cell temperature 25 °C, AM 1.5

# **Operating Conditions**


Operating Temperature	[°C]	-40 ~+90
Maximum System Voltage	[V]	1,000
Maximum Series Fuse Rating	[A]	20
Mechanical Test Load (Front)	[Pa/psf]	5,400 / 113
Mechanical Test Load (Rear)	[Pa/psf]	4,000 / 83.5

<sup>\*</sup> Test Load = Design x Safety Factor (1.5)

# **Packaging Configuration**

Number of Modules per Pallet	[EA]	25
Number of Modules per 40ft HQ Container	[EA]	650
Packaging Box Dimensions (L x W x H)	[mm]	1,750 x 1,120 x 1,221
Packaging Box Gross Weight	[kg]	473

#### Dimensions (mm / inch)

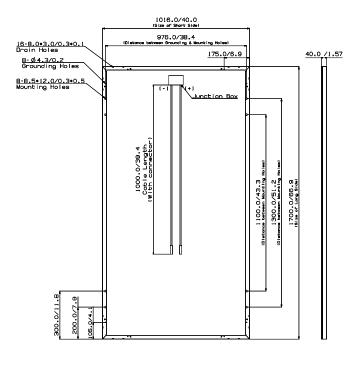



LG Electronics Inc. Solar Business Division 2000 Millbrook Drive Lincolnshire, IL 60069

www.lg-solar.com

Product specifications are subject to change without notice. LG360Q1C-V5\_US\_Ver01.pdf

 $\ \ \,$   $\ \ \,$   $\ \ \,$   $\ \ \,$   $\ \ \,$   $\ \ \,$   $\ \ \,$   $\ \ \,$   $\ \ \,$   $\ \ \,$   $\ \ \,$   $\ \$   $\ \ \,$   $\ \$   $\$   $\ \$   $\$   $\ \$   $\$   $\$   $\ \$   $\$   $\ \$   $\$   $\ \$   $\$   $\$   $\$   $\$   $\ \$   $\$   $\$   $\$   $\$   $\ \$   $\$ 



LG360Q1C-V5.indd 2 3/28/19 6:22 PM