

CTJ Photovoltaic Cell – 5.5mm x 5.5mm


Triple-Junction Solar Cell for Terrestrial Applications

Cell Optimized for 500X Concentration



DATASHEET | OCTOBER 2011


SOLAR POWER

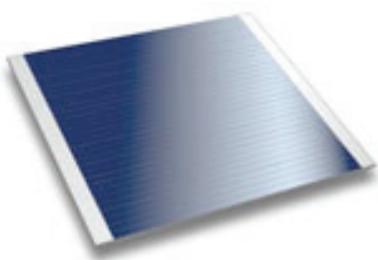

Typical Current-Voltage Parameters at 50 W/cm², 25°C

| Parameter | Value at 25°C, 50 W/cm ² |
|----------------|-------------------------------------|
| Efficiency (%) | 39 |
| Isc (Amps) | 2.2 |
| Imp (Amps) | 2.1 |
| Voc (Volts) | 3.2 |
| Vmp (Volts) | 2.8 |
| FF (%) | 88 |

Efficiency vs. Concentration Characteristics

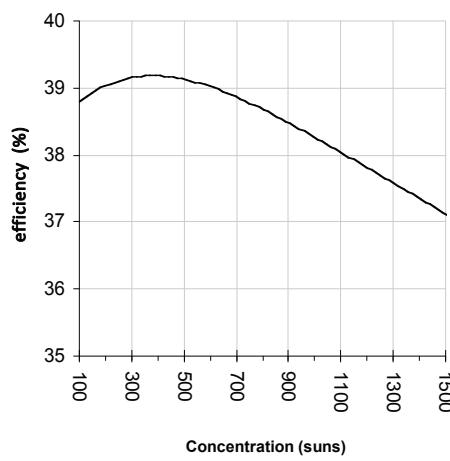

Part No. 616405

EMCORE's Concentrating Triple-Junction (CTJ) solar cells with n-on-p polarity are built on germanium substrates and incorporate a proprietary antireflective coating that provides low reflectance over a wavelength range of 0.3 to 1.8 μm. These high-efficiency solar cells are optimized for terrestrial applications under concentrated incident illumination and high current densities.


Features and Characteristics

- Series interconnected triple-junction solar cells monolithically integrated on germanium.
- Photovoltaic absorber materials and bandgap energies are 1.86eV InGaP, 1.40eV InGaAs, and 0.67eV Ge.
- Optimized for operation at 500 suns and 25°C under ASTM G173-03 direct reference spectrum. Custom design is also available for variables such as cell size, operating intensity, spectrum, temperature.
- Weld or solder enabled front and back contact metallization terminated in silver/gold alloy.
- All cells are flash tested at concentration at 25°C.
- A variety of shipping options are available, including waffle packs, tape and reel, or processed wafers.
- 150MW/yr manufacturing capacity.

Nominal Temperature Coefficients at 50 W/cm²

| Parameter | Absolute, 10°C to 100°C Range | | Relative, at 25°C | |
|------------------|-------------------------------|--------------------------------|-------------------|--------|
| | Absolute °C | Relative %/°C | Absolute °C | PPM/°C |
| Efficiency | -0.04 | absolute %/°C | -1080 | PPM/°C |
| Vmp | -4.5 | millivolts/°C | -1610 | PPM/°C |
| Jmp | 4.7 | milliamps/cm ² /°C | 570 | PPM/°C |
| responsivity@Vmp | 7.7 | X10 ⁻⁵ Amps/Watt/°C | 570 | PPM/°C |

Quantum Efficiency

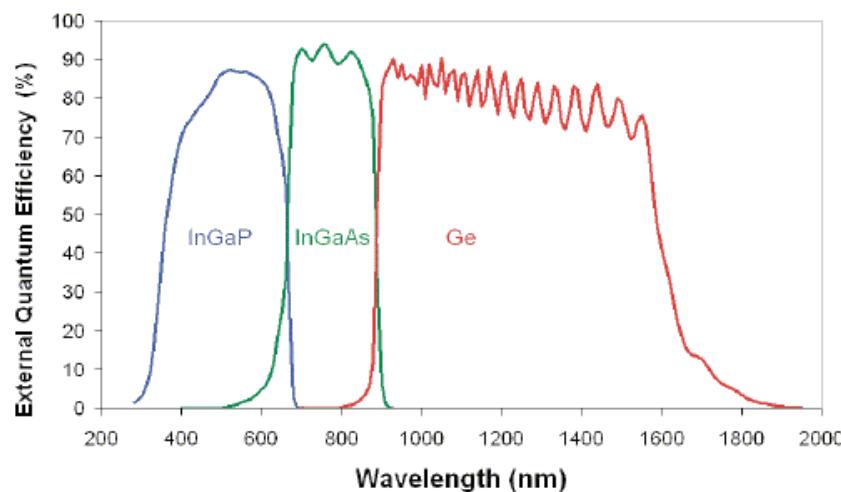

CTJ Photovoltaic Cell – 5.5mm x 5.5mm


Triple-Junction Solar Cell for Terrestrial Applications
Cell Optimized for 500X Concentration





DATASHEET | OCTOBER 2011

SOLAR POWER

Angular Acceptance Characteristics

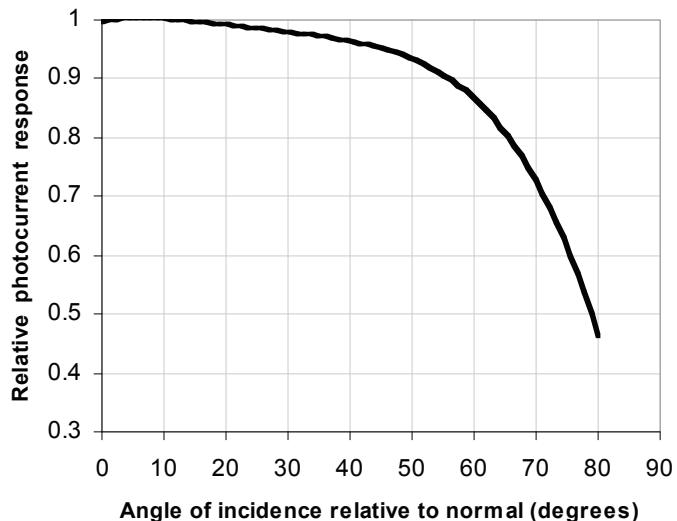

Nominal Current-Voltage Characteristics

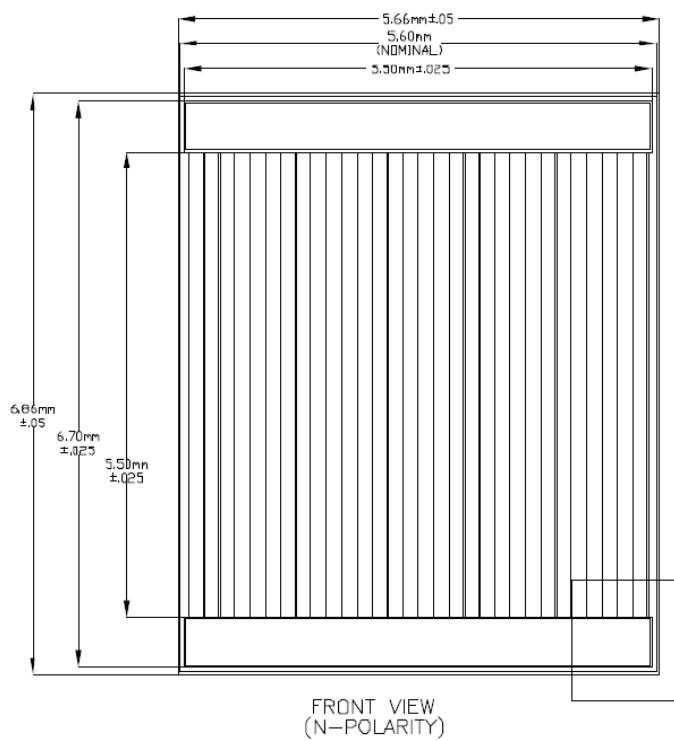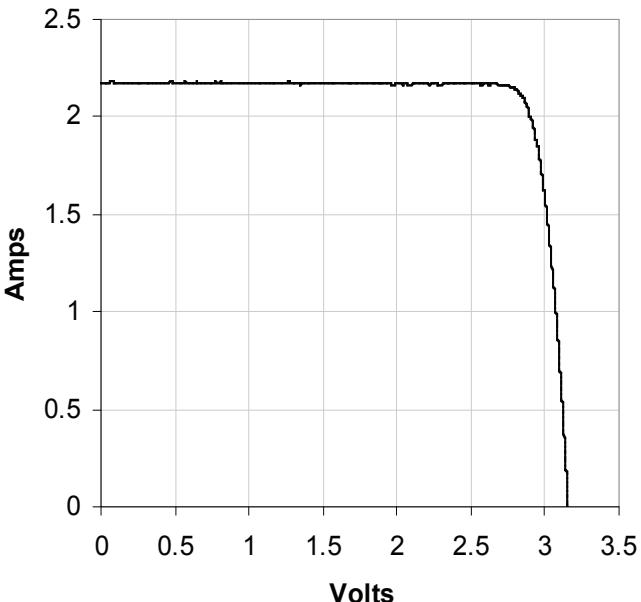

Part No. 616405

